



Cable junction box

Series HANSE-SNL

TECHNICAL FEATURES

- OPERATING TEMPERATURE

-15°C ... +60°C

- MATERIAL

ABS

Stepped nipples: PVC

Hinged Screws: Polyamid

Halogen-free, UV-resistant

UL 94 HB

- FLAMMABILITY

- PROTECTION DEGREE

IP 55

- IMPACT RESISTANCE

IK 06

- COLOUR

RAL 7035

- STANDARD ACCESSORY

Hinge cover screws

- APPROVAL




ACCESSORIES (optional, order separately)



- Wall mounting set



- Mounting plate




- Mounting rail

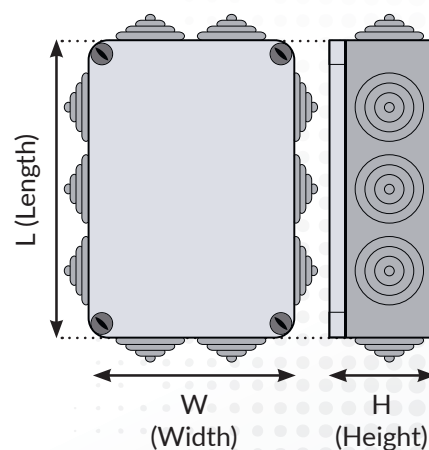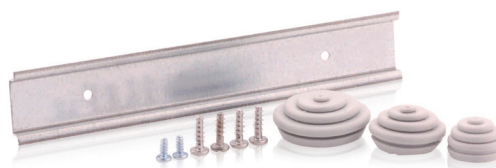

DIMENSIONS

MODEL	OUTER L x W x H (mm)	WEIGHT (kg)	STEPPED RUBBER CABLE ENTRY	NUMBER OF NIPPLES
BXPSNL400	190 x 140 x 70	0,45	14 - 32	10
BXPSNL410	240 x 190 x 90	0,75	14 - 32	12
BXPSNL420	300 x 220 x 120	1,15	14 - 32	12
BXPSNL430	380 x 300 x 120	1,60	14 - 32	14
BXPSNL440	460 x 380 x 120	2,30	14 - 32	16

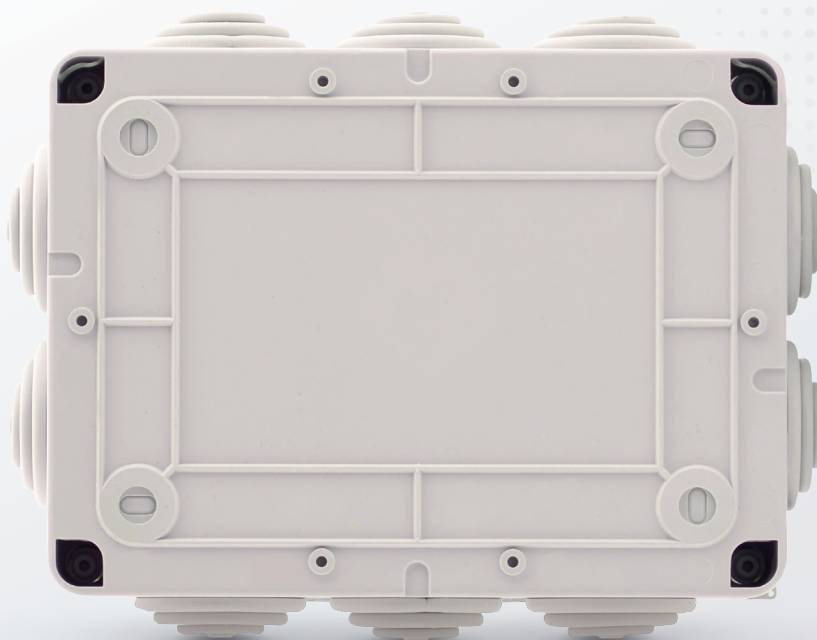



Breuell Ingenieurbüro GmbH

📍 Grützmühlenweg 46 - 22339 Hamburg

☎ (+49) 040-538092-255

☎ (+49) 040-538092-85

✉ info@boxexpert.de

🌐 www.boxexpert.de

